
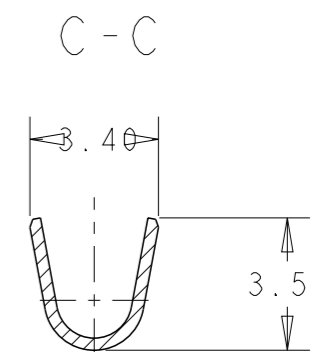
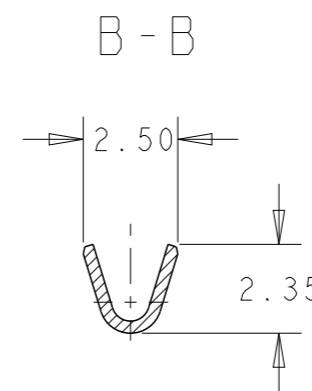
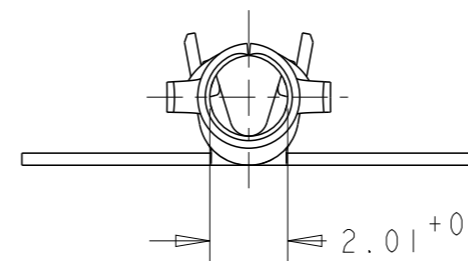


LOC
AL

DIST
2

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	J2	ECR-11-005629	17AUG2011	C. J	R. P
	J3	ECR-12-015397	17SEP2012	MGT	R. P

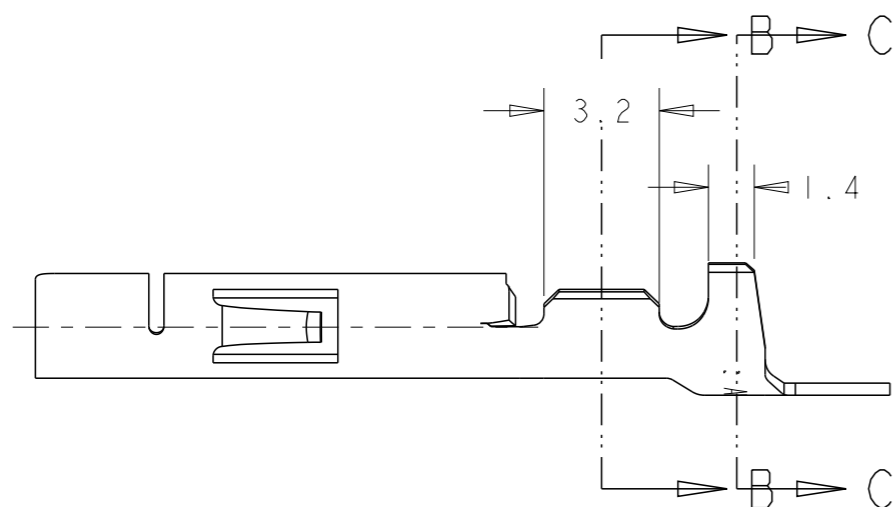


NOTES:

Bemerkungen:

- 1 2-6µm Sn OVER Ni IN CRIMP-AREA
2-6µm Sn über Ni in der Crimpzone
- 2 0.8µm Au OVER Ni IN CONTACT-AREA
0.8µm Au über Ni in der Kontaktzone
- 3 SUITABLE FOR Ø1.0-2.5mm
Für Isolations Ø1.0-2.5mm geeignet
- 4 0.8µm Au OVER 1.3µm Ni ON INSIDE OF WIRE BARREL AND CONTACT AREA
0.8µm Au über 1.3µm Ni in der Drahtcrimp und Kontaktzonen, sonst 1.3µm Ni

LOOSE PIECE	PART NO.	MATERIAL	FINISH
Superseded by 350851-7	926895-7	926884-7 CuZn30	1 2
	926895-6	926884-6 CuSn4	1 2
	926895-3	926884-3 CuSn4	PRE-TIN
OBSOLETE	926895-2	926884-2 CuZn30	4
	926895-1	926884-1 CuZn30	PRE-TIN

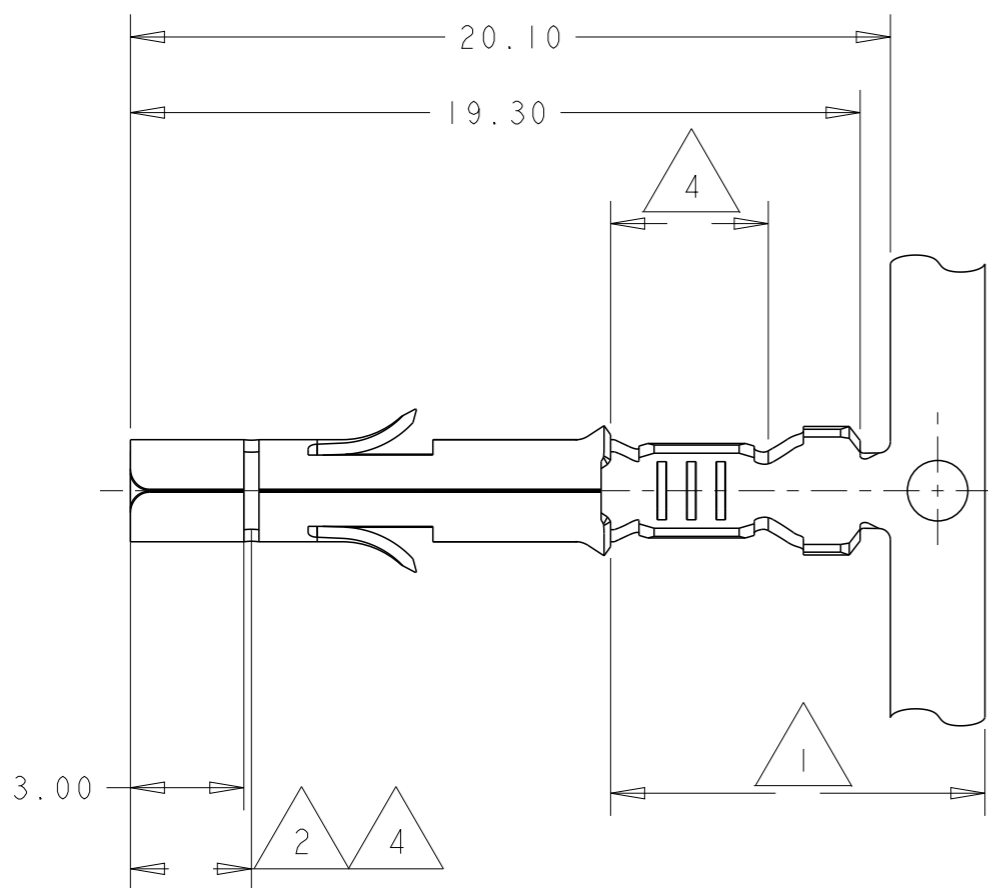

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. Skoda 07NOV2005	STE TE Connectivity	
DIMENSIONS: mm		CHK R. Vlcek		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD -	NAME UNIVERSAL MNL SOCKET 0.2-0.8 mm ² WIRE RANGE	
0 PLC ±0.2		PRODUCT SPEC 108-1031	SIZE A3	
1 PLC ±0.2		APPLICATION SPEC 114-18011	CAGE CODE 00779	DRAWING NO G-926884
2 PLC ±0.2		WEIGHT -	RESTRICTED TO -	
3 PLC ±		CUSTOMER DRAWING	SCALE 5:1	SHEET 1 OF 1
4 PLC ±				REV J3
ANGLES ±°				
FINISH SEE TABLE				