


COMMENT:  
 ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,  
 IT MAY NEITHER BE DUPLICATED NOR MADE AVAILABLE TO A THIRD PARTY,  
 AND IT ALSO MAY NOT BE IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.

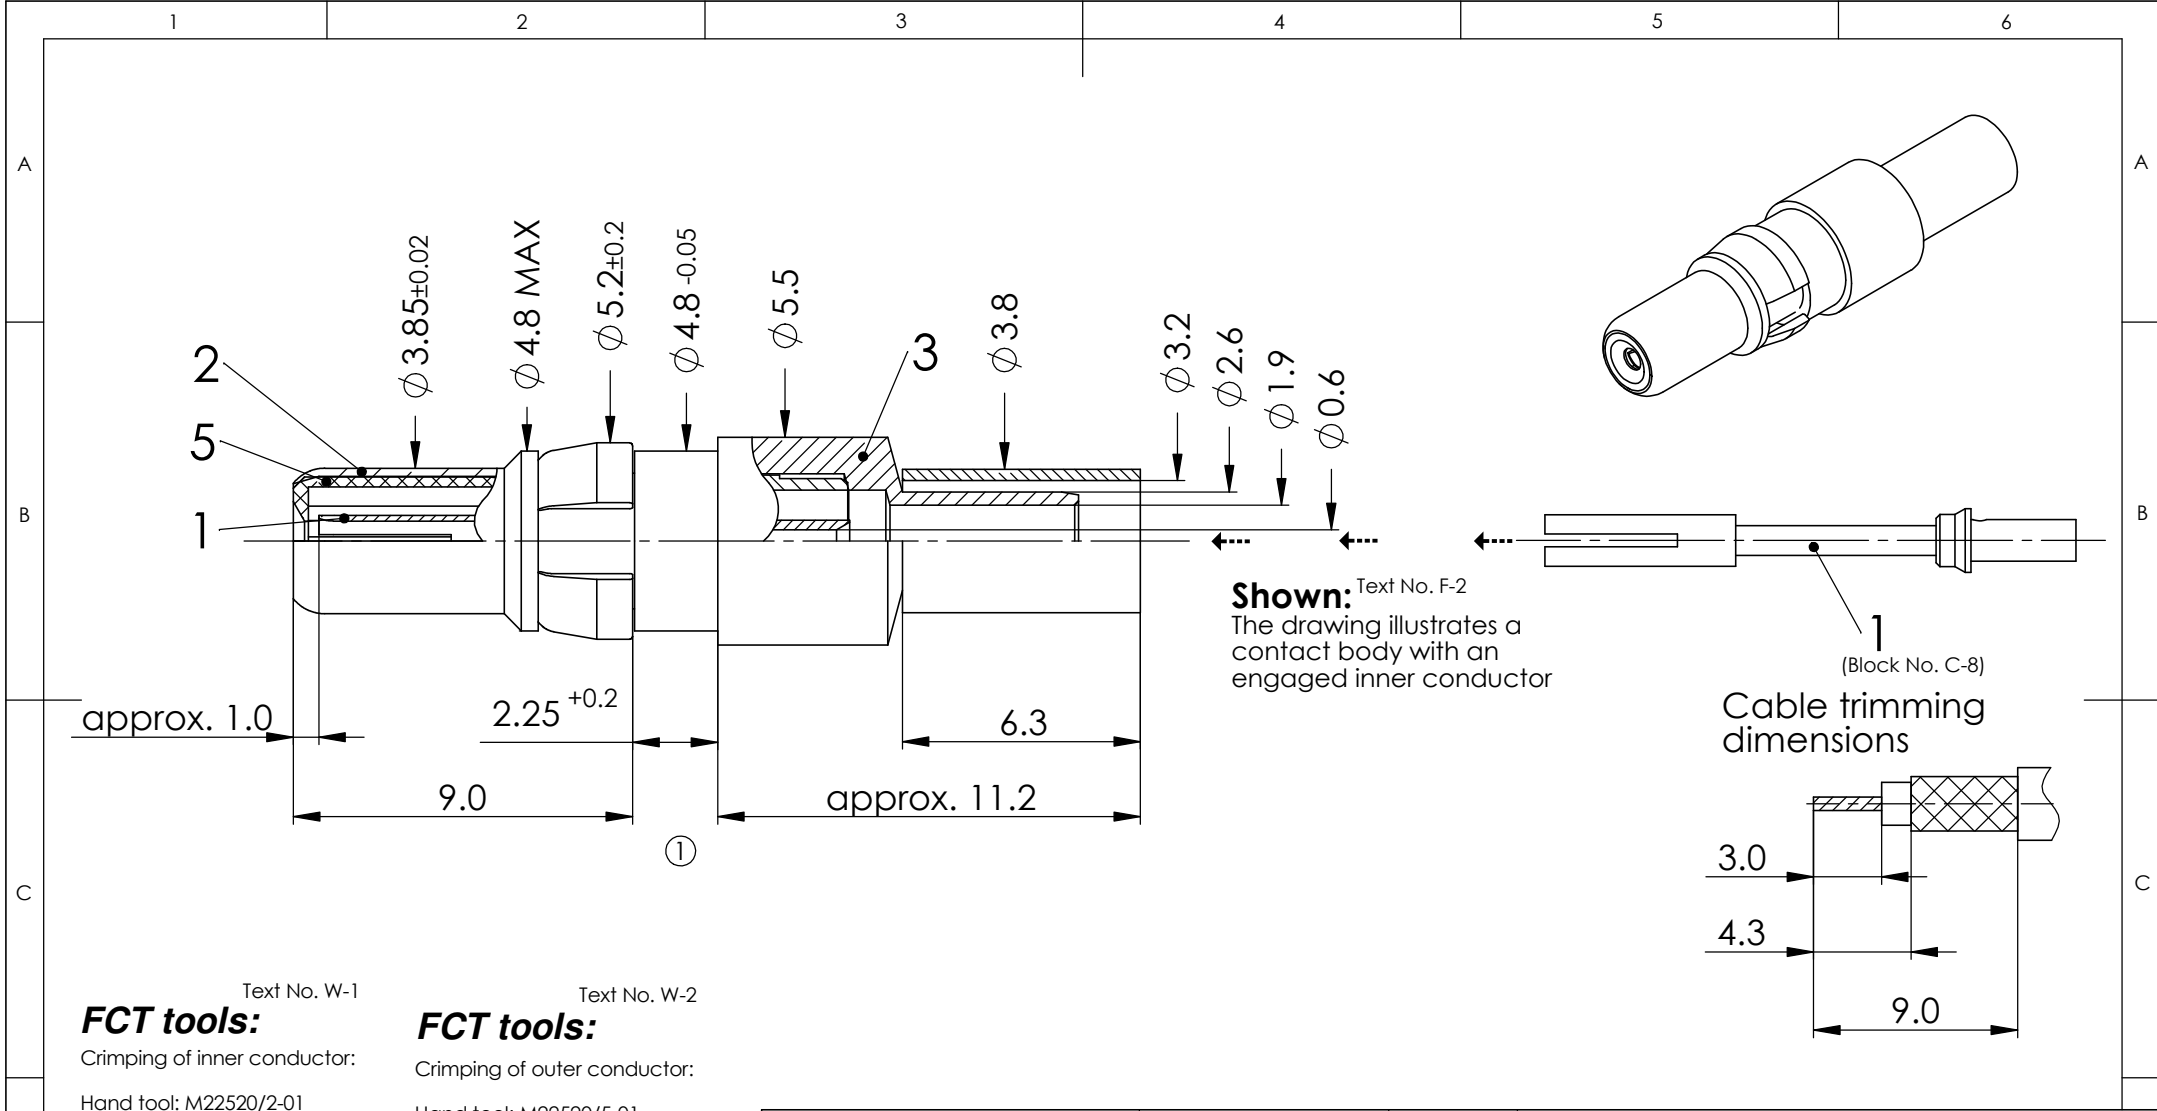

Text No. W-1  
**FCT tools:**

Crimping of inner conductor:  
 Hand tool: M22520/2-01  
 Locator: K1003

Pneumatic crimp tool: WA22  
 Locator: K1003

Cable:  
 AWG 24 / SEL. 5  
 AWG 26 / SEL. 5  
 AWG 28 / SEL. 4  
 AWG 30 / SEL. 3

Text No. W-2  
**FCT tools:**

Crimping of outer conductor:  
 Hand tool: M22520/5-01  
 Die: Y1535P cavity B

Pneumatic crimp tool: HX23  
 (replacement for PH4001) ②

Extraction tool: DRK38

IMPEDANCE		50 Ohm		<i>COAXIAL CONTACT</i>		SCALE		CABLE	
FOR		D-SUB				5:1		RG174U, RG188AU, RG316U	
DIMENSIONS IN MM				DRAWN		NAME / DATE		DATA SHEET	
MATERIAL + FINISH SEE EXTRA SHEET				CHECKED		ffuhrmann 31-07-2006			
UNLESS OTHERWISE SPECIFIED DIMENSIONS FOR REFERENCE ONLY						MTeubel 12-10-2012			
2		12-10-2012		23305				PART NO.	
REV.		DATE		INDEX				FMS001P	
1		2				ORIGINAL: DIN A4-DRAWING AS A FILE		REPLACEMENT FOR:	
								2	
								PAGE: 1/1	